

Everlast II Traditional Steel Roofing and Siding Panel

Description

True 29-gauge steel (before paint) with heavy-duty metallic coating is encased in abrasion-busting primer and Siliconized Modified Polyester topcoat to deliver enduring corrosion resistance and longer life. Wider blanks, deeper minor rib heights create a stronger more durable panel.

Advantages of Everlast II Traditional

- Synergy chalk and fade resistance
- Greater snow and wind yields and hail resistance
- Highly resistant to UV rays, acid rain, salt spray, and abrasion

UL Ratings


- UL construction No# 560 UPLIFT TEST
- UL 2218 Class 4 IMPACT RESISTANCE
- UL 790 Class A FIRE RESISTANCE

Roofing and Siding Applications

- Agricultural
- Architectural
- Commercial
- Industrial
- Residential

Standard Specifications

- 29-gauge (.015 minimum) Structural Steel Grade 80 produced in conformance with ASTM792
- 95,000 PSI minimum yield
- Siliconized Modified Polyester Paint System with standard primer
- Heat-formed panels with 3/4" major rib height; 3/16" minor rib height
- 36" cover width
- Custom cut to the inch up to 40' feet
- Available in wide variety of colors
- 3:12 recommended minimum roof pitch
- 40-year non-prorated warranty
- 10-year edge rust warranty
- Cut panels coated with CECI™

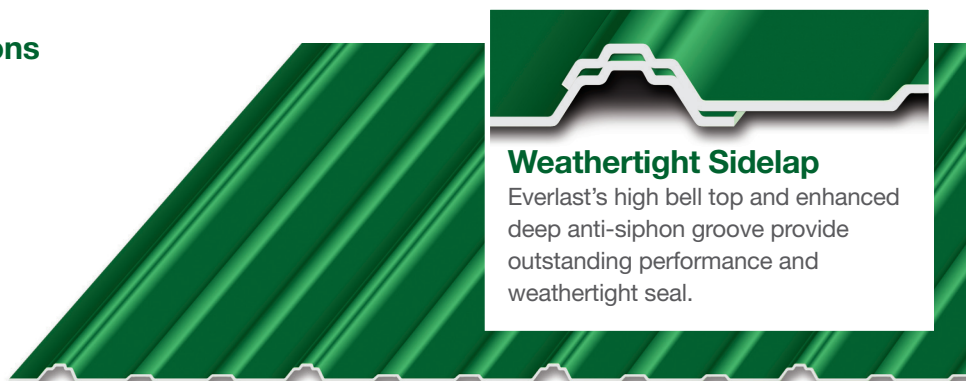

Weathertight Sidelap

Everlast's high bell top and enhanced deep anti-siphon groove provide outstanding performance and weathertight seal.

